




## LED Jaspis

- The push dimmer on the pole allows stepless adjustment of the light intensity and the switching on/off of the light.
- Direct (~45%) and indirect (~55%) illumination.
- High energy efficiency for an economical product.
- The optimized diffusor guarantee a pleasant and homogeneous light distribution on the work surface and avoids disturbing glare.
- 5 years warranty

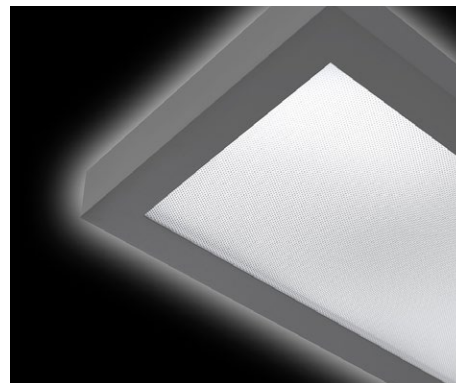

### Technical data

Power:	52 W
Weighted energy consumption:	52 kWh / 1000 h
Voltage:	200 – 240 V AC, 50 Hz
Luminous flux:	5600 Lumen, 2500 lm direct, 3100 lm indirect
Luminous efficacy:	108 Lumen / Watt
Colour temperature:	4000 Kelvin (neutral white), max. 3 MacAdam ellipses
Maximum illuminance:	1200 Lux (measuring distance 115 cm)
Colour rendering index (CRI):	> 80
UGR (Unified Glare Rating):	< 19
Life time:	50 000 hours (L 80)
Stand-by power:	< 0.5 W
Height:	1965 mm
Base:	420 mm x 220 mm x 8 mm (L x W x H)
Head of lamp:	500 mm x 220 mm x 41 mm (L x W x H)
Pole:	35 mm x 35 mm, in two parts
Length of the cable:	2.0 m, socket on the pole
Net weight:	10 kg
Material:	aluminium, steel, PS, PMMA
Packaging:	white packaging with coloured label
	1 parcel: 115 x 40 x 8 cm, 11.5 kg, girth: 211 cm
Light source:	energy efficiency class: C model identification: jaspi0000072x

**Item number:** **41-5010.727 white**  
**41-5010.728 anthracite**

### Interchangeability

The lighting source cannot be replaced. The construction of the luminaire does not allow the lighting source to be replaced, as there is a risk of damaging the luminaire.

**styro GmbH**  
Industriestrasse 2  
D-91583 Schillingsfürst  
www.styro.de